


- Top of the range pure aluminum foil capacitor,
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- A luxury capacitor designed especially for modern high-end tweeters and mid-range drivers

**DRAWING (mm)**



**PICTURE**

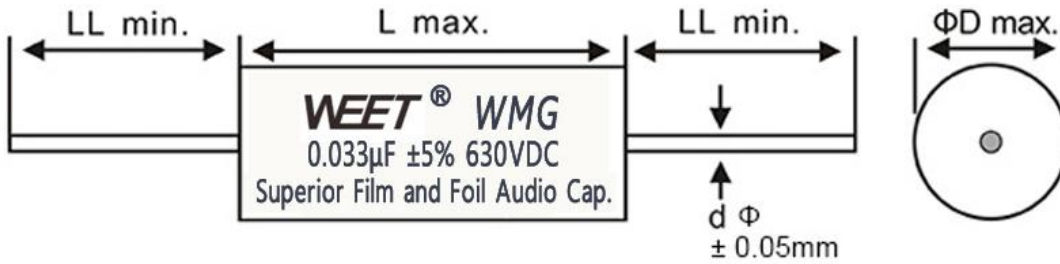

**SPECIFICATIONS**

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	0.01~0.47uF
Capacitance tolerance	±5% (J) 1KHz
Rated voltage	630V DC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0005 1KHz
Insulate the electric resistance	CR≤0.33μF, I.R≥15,000MΩ
	CR>0.33μF, I.R≥5,000S
Leads Diameter	0.8mm Tinned Copper Wire

## SIZE TABLE (mm)

μF	630V				
	Dissipation	OD	L	d	LL
0.01μF	≤0.0005	7.5	25	0.8	38
0.022μF	≤0.0005	8	25	0.8	38
0.033μF	≤0.0005	9	25	0.8	38
0.047μF	≤0.0005	10	25	0.8	38
0.068μF	≤0.0005	11	31.5	0.8	38
0.1μF	≤0.0005	13	31.5	0.8	38
0.22μF	≤0.0005	17.5	31.5	0.8	38
0.33μF	≤0.0005	21	31.5	0.8	38
0.47μF	≤0.0005	20.5	36	0.8	38

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

