


PARAMETERS

Impedance	4 ohms
Re	3.23 ohms
Le	0.3 mH
Fs	1612 Hz
Qms	5.23
Qes	2.54
Qts	1.71
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	94 dB 2.83V/1m
RMS Power Handling	40 watts
Usable Frequency Range (Hz)	3,000 - 20,000 Hz

FEATURES


- Extremely smooth response makes for easy transition to midrange driver
- Over 94 dB efficiency is perfect for use in higher output designs
- Attached heatsink and ferrofluid cooling for increased power handling
- Compact cast aluminum faceplate minimizes center-to-center distance
- High temperature neodymium motor allows high output for extended periods

IMPEDANCE/PHASE

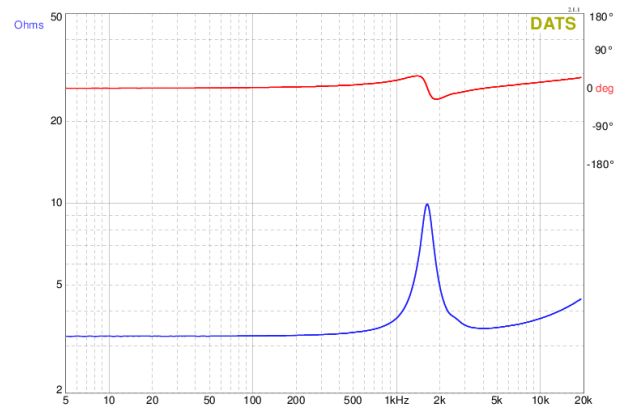

FREQUENCY RESPONSE

OMNIMIC

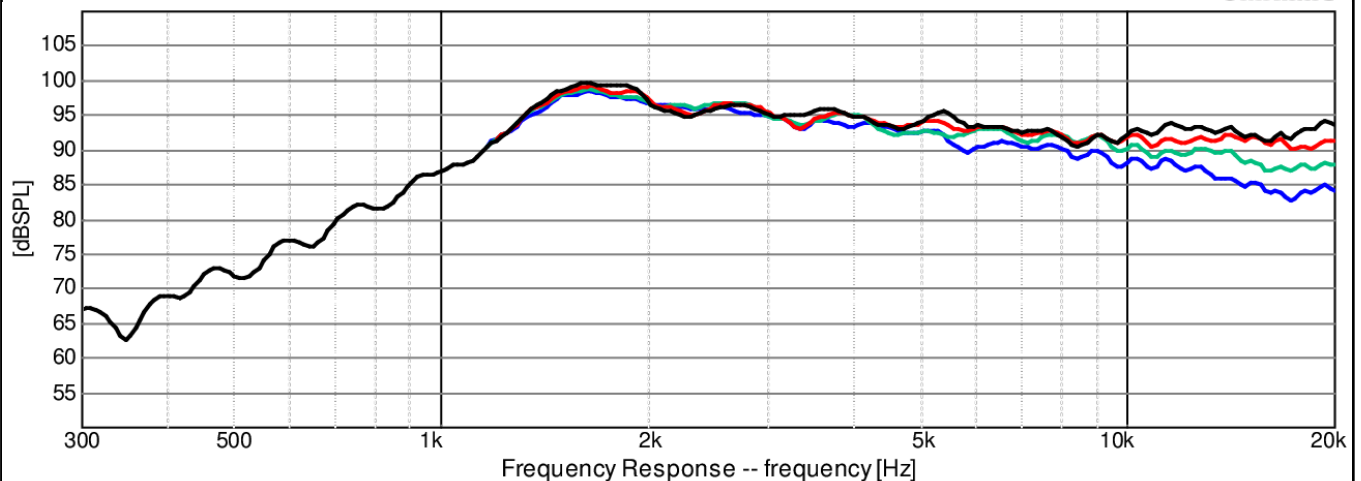

OmniMic

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°